




Product Name: 3D Vinly Film			
Product Item No.	3D	Unit	reference standard
Front projection	Passive spectral 3d and Passive Polarized 3d		
Weight		270 gr(±10)gsm	
Tensile Load	Meridional	≥2000	N/5cm
	Zonal		N/5cm
Tear Load	Meridional	≥70	N/5cm
	Zonal	≥100	N/5cm
Peel off Strength	Meridional	≥38	N/5cm
	Zonal		N/5cm
Fire Resistant	m1-en13501	PERFORATION	35.800 holes 1.2mm/m ²
Cleanable	YES	Antistatic	YES
Viewing Angle	150° (L&R75°)	Gain	1.6
Suitable temperature	5°+ ~ 30°+	Product structure	3D PVC film+2d pvc film
Width	210cm	Thickness	0.22mm +-2mm
Note: If customers have special needs, according to the contract.			
Application:			
It is a high-tech product applied to teaching, recreation and sports, film and television and media, features natural and clear image as well as soft color, contributes to eyesight protection, and has the characteristics of good brightness, good visual effect, low cost, mould prevention, fire resistance, water resistance, crease resistance, Antistatic, etc. the curtain fabric boasts vertical stretching, no hemming, no yellowing, no crumple and no crease.			

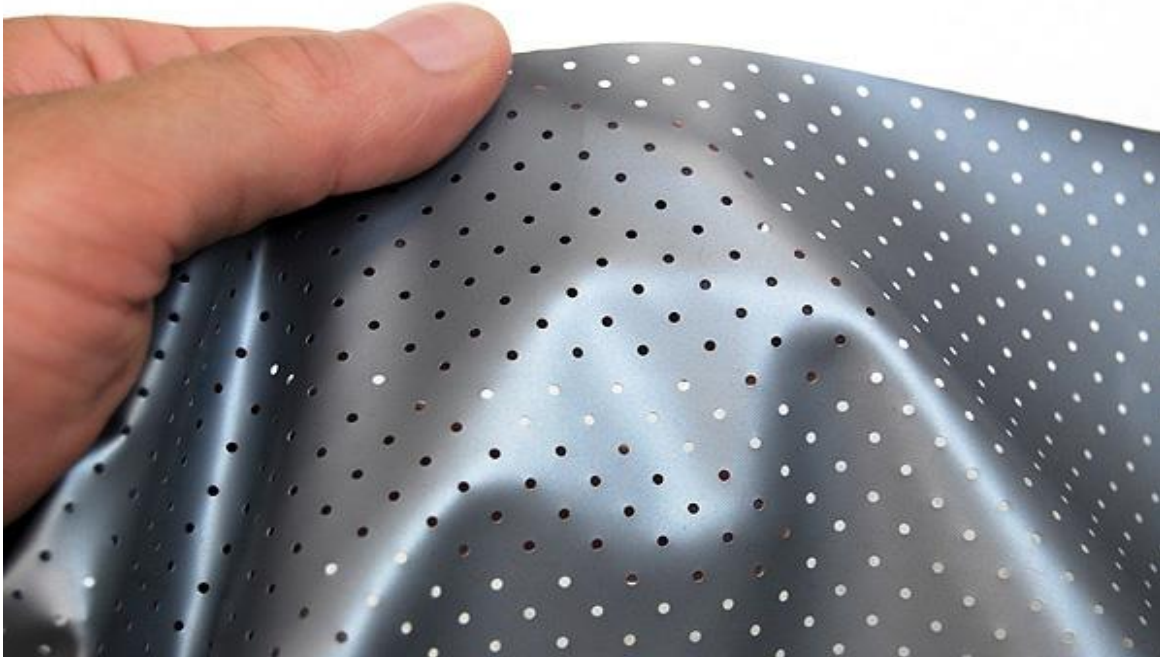

**Tel:0212 505 88 99 fax: 0212 250 60 08 www.bestvision.com.tr
info@bestvision.com.tr**